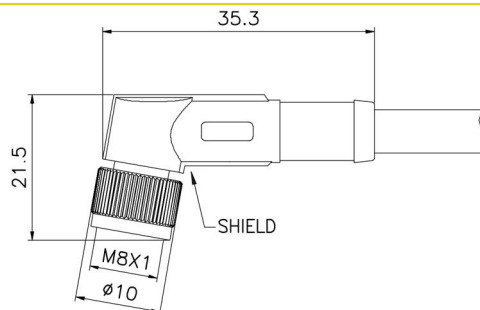




- M8 female molded cable ,90degree,shielded
- Description:M8 female molded 90degree shielded cable with free end,A/B/D coded




Assembly Instruction



1 Brown
3 Blue
4 Black









1 Brown
2 White
3 Blue
4 Black



1 Yellow
2 White
3 Orange
4 Blue

Technical Data

Pin No.	3	4	4	5	6	8
Coding	A	A	D	B	A	A
Pin for reference						
Type	Molded					
Rated current	3A	3A	4A	3A	1.5A	1.5A
Rated voltage	60V	60V	60V	30V	30V	30V
Operating Temperature	-25℃~85℃					
Degree of protection	IP67/IP68					
Connector locking system	Solder					
Mechanical operation	>500 mating cycles					
Contact resistance	≤10mΩ					
Material of connector	CuZn,TPU or PVC					
Contact plating	Au(gold plating)					
Cable size	0.25mm ²	0.25mm ²	0.25mm ²	0.25mm ²	0.14mm ²	0.14mm ²

Order Information

Part No.	Model No.
M8- -FR- - - -SH Coded Pin No. Length Cable materials	RG081008

Remark:We usually made the free end type strip 30mm. shielded wire contact the metal shell .contact us any time if you have custom requirements.