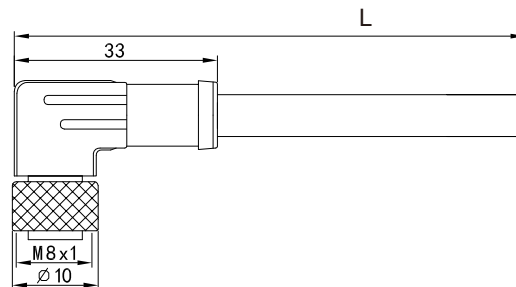
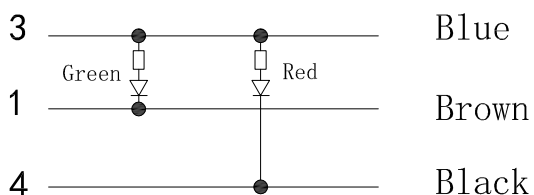


- M8 female molded cable ,90degree,shielded
- Description:M8 female with LED display molded 90degree shielded cable with free end,A/B/D coded









## Assembly Instruction

P1



## Technical Data

Pin No.	3	4	4	5	6	8
Coding	A	A	D	B	A	A
Pin for reference						
Type	Molded					
Rated current	3A	3A	4A	3A	1.5A	1.5A
Rated voltage	60V	60V	60V	30V	30V	30V
Operating Temperature	-25℃~85℃					
Degree of protection	IP67/IP68					
Connector locking system	Solder					
Mechanical operation	>500 mating cycles					
Contact resistance	≤10mΩ					
Material of connector	CuZn,TPU or PVC					
Contact plating	Au(gold plating)					
Cable size	0.25mm <sup>2</sup>	0.25mm <sup>2</sup>	0.25mm <sup>2</sup>	0.25mm <sup>2</sup>	0.14mm <sup>2</sup>	0.14mm <sup>2</sup>

## Order Information

Part No.	Model No.
M8-A-FR-3- <input type="text"/> -PVC-LED Length	RG081009
Remark:We usually made the free end type strip 30mm. shielded wire contact the metal shell .contact us any time if you have custom requirements.	