



M9 Series



- M9 female molded cable ,straight.
- Description:M9 female molded straight cable with free end.

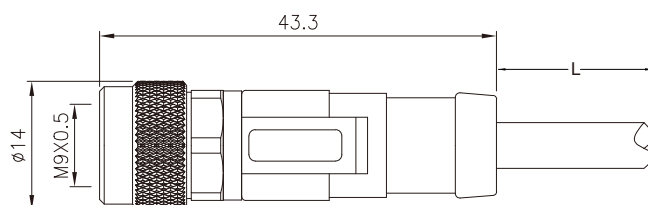

Assembly Instruction

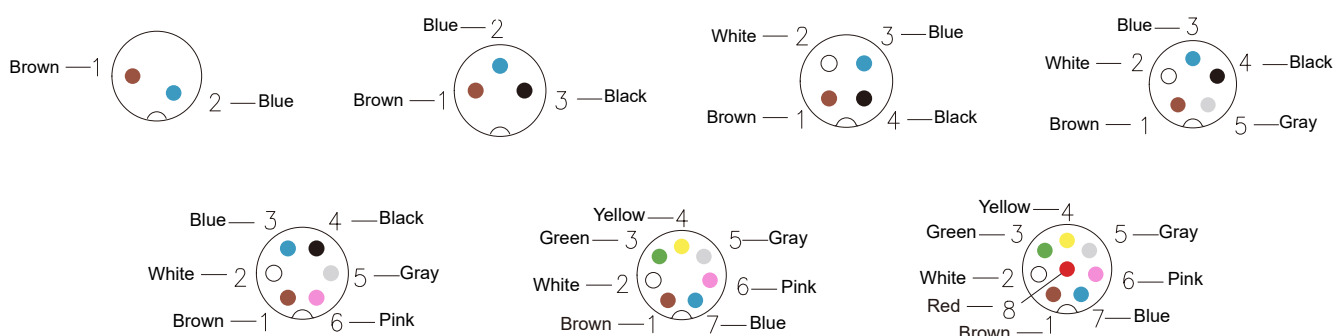

Technical Data

Pin No.	2	3	4	5	6	7	8
Coding	A	A	A	A	A	A	A
Pin for reference							
Type	Molded						
Rated current	4A	4A	3A	3A	1A	1A	1A
Rated voltage	125V	125V	125V	125V	125V	125V	125V
Operating Temperature	-25℃~70℃						
Degree of protection	IP67						
Connector locking system	Solder						
Mechanical operation	>500 mating cycles						
Contact resistance	≤3mΩ						
Material of connector	CuZn						
Contact plating	Au(gold plating)						
Cable size	24AWG	24AWG	24AWG	24AWG	26AWG	26AWG	26AWG

Order Information

■ Part No.	■ Model No.
M9-A-FS- - - Pin No. Length Cable materials	SYW091003
Remark:We usually made the free end type strip 30mm. shielded wire contact the metal shell .contact us any time if you have custom requirements.	