



- M12 female with NPN LED display molded cable
- Description:M12 4pin female 90degree NPN LED display molded cable with free end

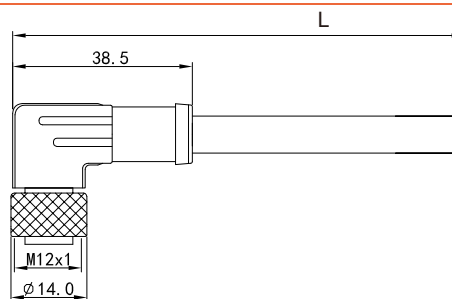


Assembly Instruction

PIN ASSIGNMENT (NPN)

P1

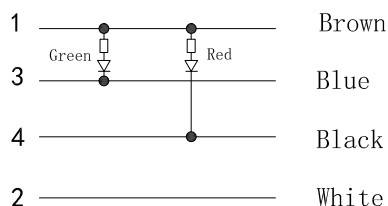

Technical Data

Pin No.	4
Coding	A
Pin for reference	
Type	Molded
Rated current	4A
Rated voltage	36V
Operating Temperature	-25 C ~85 C
Degree of protection	IP67/IP68
Connector locking system	Solder
Mechanical operation	>500 mating cycles
Contact resistance	≤10mΩ
Material of connector	CuZn,TPU or PVC
Contact plating	Au(gold plating)
Cable AWG	22AWG

Order Information

Part No.	Model No.
M12-A-FR-4P - <input type="text"/> -PVC-N Length	RG121008
Remark:We usually made the free end type strip 30mm. shielded wire contact the metal shell .contact us any time if you have custom requirements.	