
D-SUB

M12 Series





- M12 male panel mount connector ,straight.
- Description:M12 male rear panel mount connector, with wires





## **Assembly Instruction**



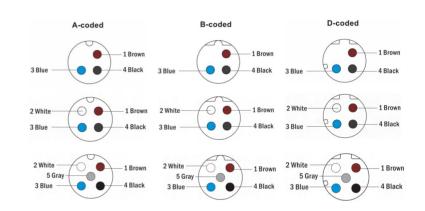

## **Technical Data**

Pin No.	3	4	5	8	12	17	5	4
Coding	Α	Α	Α	Α	Α	Α	В	D
Pin for reference	3 4	2 1 1 4	2 1 1 4	3 4 4 5	3 4 5 0 11 0 12 0 19 8 7	13 3 2 12 17 17 14 14 15 7 8 16	2 1 1 5 4	2 1 1 4
Туре	panel mount							
Rated current	4A	4A	4A	2A	1.5A	1.5A	4A	4A
Rated voltage	250V	250V	60V	30V	30V	30V	60V	250V
Operating Temperature	<b>-25℃~85</b> ℃							
Degree of protection	IP67/IP68							
Connector locking system	Wire							
Mechanical operation	>500 mating cycles							
Contact resistance	≤10mΩ							
Material of connector	CuZn,TPU							
Contact plating	Au(gold plating)							
Materail of housing	Brass/Zinc diecasting nickel plated							

## **Order Information**

