




- M12 female panel mount connector ,straight.
- Description:M12 female rear panel mount connector , with wires





Assembly Instruction








Technical Data

Pin No.	3	4	5	8	12	17	5	4
Coding	А	А	А	A	А	А	В	D
Pin for reference		$4 \bigcirc 0 \bigcirc 2 \\ 3 \bigcirc 3$		$\begin{array}{c}1\\7\\6\\6\\5\end{array}$	$\begin{array}{c}1\\9\\0\\12\\0\\7\\0\\6\end{array}$	$\begin{array}{cccccccccccccccccccccccccccccccccccc$	$4 \bigcirc 0 \bigcirc 2$	1 0 0 2 4 0 0 5 3
Туре	panel mount							
Rated current	4A	4A	4A	2A	1.5A	1.5A	4A	4A
Rated voltage	250V	250V	60V	30V	30V	30V	60V	250V
Operating Temperature	-25 °C ~85 °C							
Degree of protection	IP67/IP68							
Connector locking system	Wire							
Mechanical operation	>500 mating cycles							
Contact resistance	≤10mΩ							
Material of connector	CuZn,TPU							
Contact plating	Au(gold plating)							
Materail of housing	Brass/Zinc diecasting nickel plated							

Order Information

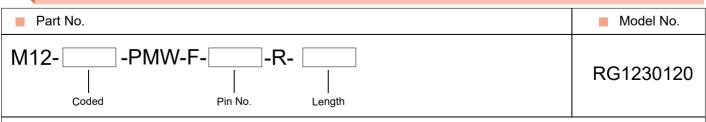

Remark:Contact us any time if you have custom requirements.

8

610

M18

USB

D-SUB

RD24

RD30

Value