



M16 Series



- M16 male assembly connector ,straight ,plastic outlet
- Description:M16 male straight metal solder assembly connector ,plastic outlet

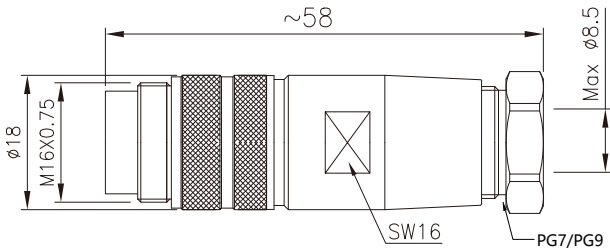

Assembly Instruction

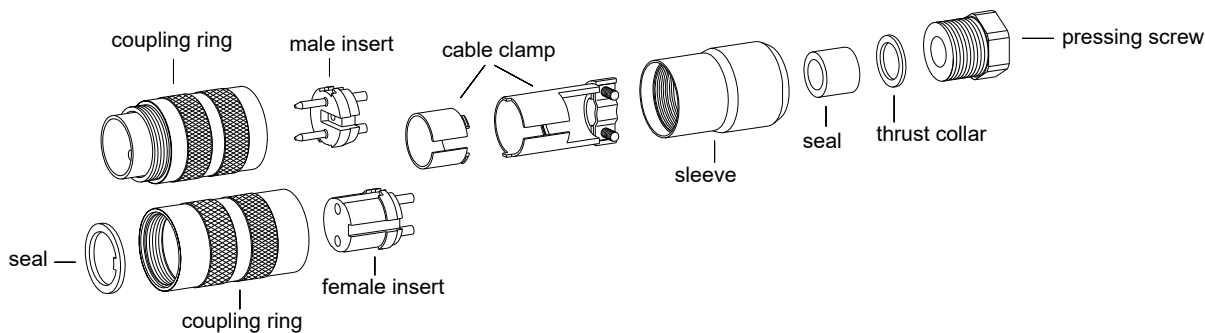

Technical Data

Pin No.	7(DIN)	8(DIN)	12	14	16	19	24
Pin for reference							
Type	Assembly						
Rated current	5A	5A	5A	3A	3A	3A	1A
Rated voltage	125V	125V	60V	60V	60V	60V	60V
Operating Temperature	-20℃~80℃						
Degree of protection	IP67/IP68						
Connector locking system	Solder						
Mechanical operation	>500 mating cycles						
Contact resistance	≤5mΩ						
Material of connector	CuZn,TPU						
Contact plating	Au(gold plating)						
Outlet	Suitable OD 4-8mm cable						

Order Information

■ Part No.	■ Model No.
M16-MS- Pin No. -P	RG162003
Remark:Contact us any time if you have custom requirements.	