





- M16 female assembly connector ,straight,plastic PG7 outlet
- Description:M16 female straight plastic solder assembly connector PG7 outlet





Assembly Instruction

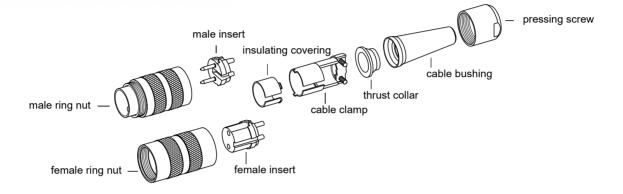

Technical Data

Pin No.	2	3(DIN)	4	5	5(Stereo)	6(DIN)	7	
Pin for reference	Ø Ø	Q 2	20 0 3 0 0 1 4	40 0 5 0 1 3	20 0 ₄ 0 0 ₅	20 0 0 ⁴ 10 16 0 5	50 0 0 2 60 0 1	
Туре	Assembly							
Rated current	7A	7A	6A	6A	6A	5A	5A	
Rated voltage	250V	250V	250V	250V	250V	250V	125V	
Operating Temperature	-20℃~80 ℃							
Degree of protection	IP67/IP68							
Connector locking system	Solder							
Mechanical operation	>500 mating cycles							
Contact resistance	≤5mΩ							
Material of connector	CuZn,TPU							
Contact plating	Au(gold plating)							
Outlet	Suitable OD 4-8mm cable							

Order Information

Part No.	Model No.			
M16-FS- Pin No.	RG162006			
Remark:Contact us any time if you have custom requirements.				