





- M16 male assembly connector ,straight ,black color
- Description:M16 male straight metal solder assembly connector ,black color





Assembly Instruction

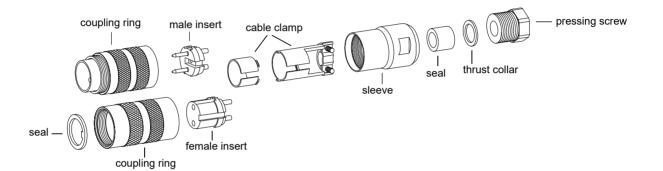

Technical Data

Pin No.	2	3(DIN)	4	5	5(Stereo)	6(DIN)	7	
					/			
Pin for reference	2	3 1	3 2	5 4 4 1	4 2	4 • 2 5 • 6 • 1	3 6 5	
Туре	Assembly							
Rated current	7A	7A	6A	6A	6A	5A	5A	
Rated voltage	250V	250V	250V	250V	250V	250V	125V	
Operating Temperature	-20℃~80 ℃							
Degree of protection	IP67/IP68							
Connector locking system	Solder							
Mechanical operation	>500 mating cycles							
Contact resistance	≤5mΩ							
Material of connector	CuZn,TPU							
Contact plating	Au(gold plating)							
Outlet	Suitable OD 4-8mm cable							

Order Information

Part No.	Model No.			
M16-MS- B	RG162007			
Remark:Contact us any time if you have custom requirements.				