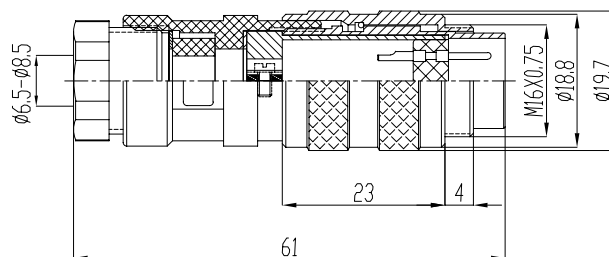
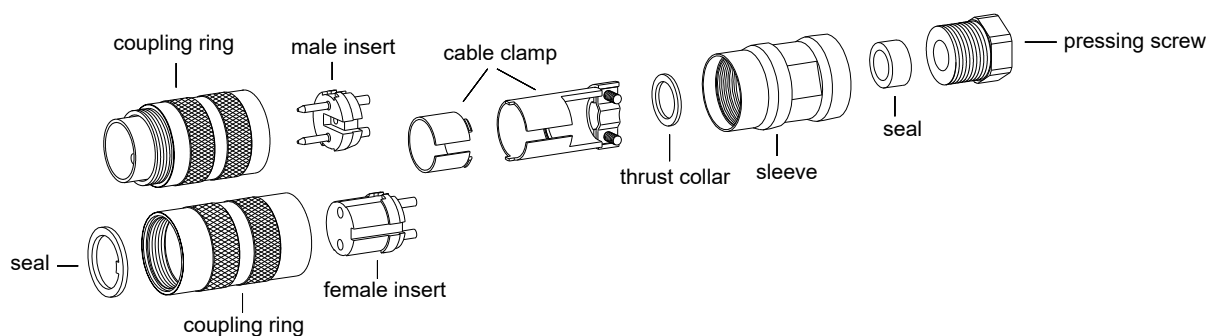


# M16 Series








- M16 male assembly connector ,straight,plastic PG9 outlet
- Description:M16 male straight plastic solder assembly connector PG9 outlet



## Assembly Instruction



## Technical Data

Pin No.	2	3(DIN)	4	5	5(Stereo)	6(DIN)	7
Pin for reference							
Type	Assembly						
Rated current	7A	7A	6A	6A	6A	5A	5A
Rated voltage	250V	250V	250V	250V	250V	250V	125V
Operating Temperature	-20℃~80℃						
Degree of protection	IP67/IP68						
Connector locking system	Solder						
Mechanical operation	>500 mating cycles						
Contact resistance	≤5mΩ						
Material of connector	CuZn,TPU						
Contact plating	Au(gold plating)						
Outlet	Suitable OD 4-8mm cable						

## Order Information

■ Part No.	■ Model No.
M16-MS- <input type="text"/> -PG9 Pin No.	RG162009
Remark:Contact us any time if you have custom requirements.	