





- M16 female assembly connector ,straight,plastic PG9 outlet
- Description:M16 female straight plastic solder assembly connector PG9 outlet





Assembly Instruction

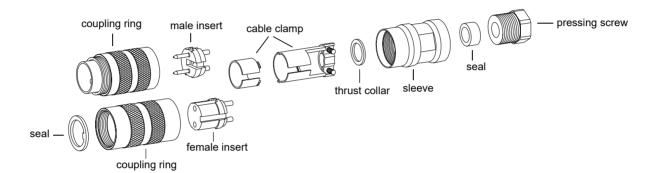

Technical Data

Pin No.	2	3(DIN)	4	5	5(Stereo)	6(DIN)	7
Pin for reference	Q 2	Q 2 Q 1 3	20 0 3 0 0 1 4	40 0 0 5 0 0 0 1	0 0 0 0 1 5 5	20 0 04 10 6 0 5	5 0 0 3 5 0 0 0 1
Туре	Assembly						
Rated current	7A	7A	6A	6A	6A	5A	5A
Rated voltage	250V	250V	250V	250V	250V	250V	125V
Operating Temperature	-20 ℃~80 °C						
Degree of protection	IP67/IP68						
Connector locking system	Solder						
Mechanical operation	>500 mating cycles						
Contact resistance	≤5mΩ						
Material of connector	CuZn,TPU						
Contact plating	Au(gold plating)						
Outlet	Suitable OD 4-8mm cable						

Order Information

