



- M16 female panel mount connector ,straight.
- Description:M16 female front panel mount connector , PCB type








Assembly Instruction



Drilling schemes female insert (PCB):

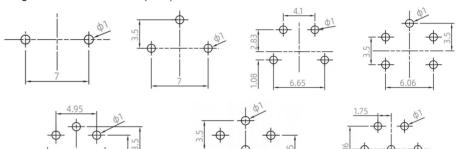

Hole Size:





Technical Data

Pin No.	2	3(DIN)	4	5	5(Stereo)	6(DIN)	7	
Pin for reference		Q 2	20 0 3 0 0 1 4	40 0 0 5 0 0 0 1 1 3	0 0 0 1 5	20 04 10 6 05	0 0 3 0 0 7 0 2 60 0 1	
Туре	panel mount							
Rated current	7A	7A	6A	6A	6A	5A	5A	
Rated voltage	250V	250V	250V	250V	250V	250V	125V	
Operating Temperature	-20°C~80°C							
Degree of protection	IP67/IP68							
Connector locking system	PCB							
Mechanical operation	>500 mating cycles							
Contact resistance	≤5mΩ							
Material of connector	CuZn,TPU							
Contact plating	Au(gold plating)							
Materail of housing	Zinc diecasting nickel plated							

Order Information

Part No.	Model No.			
M16-PMP-FF-M18	RG163006			
Remark:Contact us any time if you have custom requirements.				